Mouser Electronics

ALPHA REFERENCE NO.

SP15080162

SPECIFICATION

PART NO.	ALPHA MODEL NAME	
1.	MF02-N-221-A01	
25.4 - 72		

MODEL NAME	
MODEL NO.	

	CONDIC	
APPROVAL		
		8

PREPARED BY	REVIEWED BY	APPROVED BY



台灣艾華電子工業股份有限公司


33045 桃園市桃園區中正路 1221 號 9 樓 TAIWAN ALPHA ELECTRONIC CO., LTD.

9F, No. 1221, Chung Cheng Rd., Taoyuan Dist., Taoyuan City, 330 Taiwan

Tel: 886-3-3577799

Fax: 886-3-3577700

EMAIL: sales@taiwanalpha.com.tw URL: http://www.taiwanalpha.com

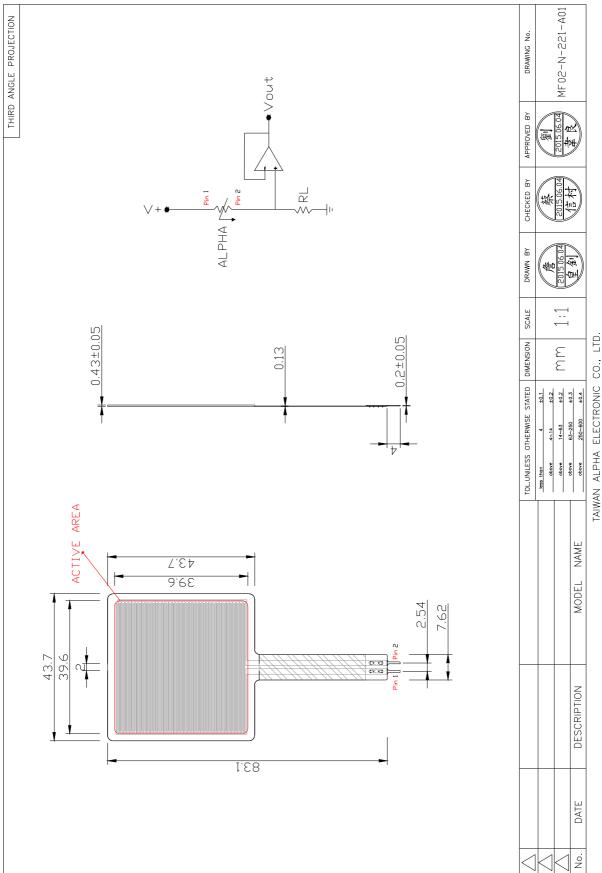



台灣艾華電子工業股份有限公司 ALPHA TAIWAN ALPHA ELECTRONIC CO., LTD.

規格書

SPECIFICATION

Model name: MF02-N-221-A01

規格	備註
SPEC.	Notes
30g	
30~1000g(0.3~9.8N)	0.7
±5%	
±20%	
Continuous(Analog)	
39.6mm*39.6mm	
>20MΩ	
<1 ms	
-20°C to +70°C	
1 million	Without Failure
0.43±0.05mm	
	SPEC. 30g 30~1000g(0.3~9.8N) ±5% ±20% Continuous(Analog) 39.6mm*39.6mm >20MΩ <1 ms -20°C to +70°C 1 million

Date: 2015/8/17 Ver.: B

<u>本資料為台灣艾華電子工業股份有限公司之機密與專有財產,非經書面許可,不得對外透露或使用本文件,亦不得</u> 複印、複製或轉變成任何其他形式使用。

The Information is confidential property of Taiwan Alpha Electronic Co., LTD. Unauthorized distribution, reproduced or disclosed part without prior written permission of Taiwan Alpha Electronic Co., LTD. is strictly prohibited.




台灣艾華電子工業股份有限公司 TAIWAN ALPHA ELECTRONIC CO., LTD.

Membrane sensor usage tips

Please follow the below stipulate to avoid error conditions such as false triggering, false readings, pre-loading, or gouging and cracking of the sensor.

- 1. The side of adhesive should be used on the firm, flat and smooth surfaces, can't not be used on the curved surfaces. Also, be careful of trapped air bubbles or dirt particles when laminating the membrane sensor to surface, it cause the sensor to appear loaded in the absence of an external load. Recommended to clean the surface before adhesive.
- 2. Do not kink, bending or scratches the tail of membrane sensors. The traces should not be bent more than 90° as the silver conductive leads could break. Also, be careful if bending the tail near the active area. This can cause stress on the active area and may result in pre-loading and false readings.
- 3. Do not block the vent. This vent assures pressure equilibrium with the environment, as well as allowing even loading and unloading of the device. Blocking this vent could cause sensors to respond to any actuation in a non-repeatable manner.
- 4. Please use an overlay, such as a polycarbonate film or an elastomer, to prevent gouging of the membrane sensors from sharp objects.
- 5. Do be careful of kinks or dents in active areas. They can cause false triggering of the sensors.
- 6. Do not apply excessive shear force. This can cause delamination of the layers.
- 7. Do not exceed 1mA of current per square centimeter of applied force (actuator area). This can irreversibly damage the device.
- 8. The sensors are not designed for use under water. The sensors are not compatible with direct liquid contact. Sensors are ideally suited to placement behind a waterproof enclosure.
- 9. With flexible substrates, the solder joint will not hold and the substrate can easily melt and distort if solder directly to the exposed silver traces. Choose standard connection, such as FFC connector, solder tabs, female contacts, or female contact with housing connectors.



Date: 2015/8/31 Ver.: A

本資料為台灣艾華電子工業股份有限公司之機密與專有財產,非經書面許可,不得對外透露或使用本文件,亦不得 複印、複製或轉變成任何其他形式使用。

The Information is confidential property of Taiwan Alpha Electronic Co., LTD. Unauthorized distribution, reproduced or disclosed part without prior written permission of Taiwan Alpha Electronic Co., LTD. is strictly prohibited.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alpha (Taiwan):

MF02-N-221-A01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alpha (Taiwan):

MF02-N-220-A01 MF02-N-221-A01