



# 东莞市环驰实业有限公司

DONGGUAN HUANCHI MOTOR CO., LTD.

## 馬達樣品確認書

### MOTOR SPECIFICATION

客戶代碼 Customer No: HC-JXGD

樣品編號 Sample Code No: 2025-3-18-1

馬達型號 Motor Model: HC7C3.0\*4.00100(3.0-1.2)

項目名稱 Customer: 0716空心杯馬達

版次 Revision No: A1

日期 Date: 2025-3-18

### 客戶承認欄 CUSTOMER' Approval

Huan Chi Approval

龚立志



### 聲明Remarks:

1) 此規格書僅用於 " 东莞市环驰实业有限公司 " 提供給貴公司的HC7C3.0\*4.00100 (3.0-1.2)型馬達。

This specification applies to Huan Chi motor:HC7C3.0\*4.00100(3.0-1.2)

2) 唯有貴公司才能確認此一馬達能否用於貴公司產品的各種性能。

Please note that it is your responsibility to ensure that the motor can the requirements applion satisfy.

3) 吾司在送樣之同時附上確認書三份，誠請貴公司於一個月內簽認此確認書，並歸返吾司一份存檔。

若貴公司已經向吾司批量訂購此產品，但確認書未簽回，則視為貴公司已承認此樣品書規格。

After having acknowledged the receipt of this specidication, Please give it back to us within one (1) month after the date of issuance thereof. If you fail to return to

us within the term herein above,we regard it as the receipt of this specifications acknowledged.

4) 若對此馬達的特性或壽命有任何疑問，其測試與判定皆以樣品為依據。

In case the motor performance and/or life questionable, tests and judgment are to be made baded on this specification.



SPEC No:HC2025-3-18-1

樣品規格

PAGES: 1/4

DATE: 2025-3-18

SPECIFICATIONS

EDITION: A1

1. 標準操作條件:Standard Operating Conditions

No.	項目:Items	規格:Specifications
1-1	額定電壓: Rated Voltage	DC 3.0V穩壓加於馬達連接線終端 3.0V DC constant between motor terminals
1-2	工作電壓範圍: Operating Voltage Range	DC:1.5-3.3V穩壓加於馬達連接線終端 1.5-3.3 DC constant between motor terminals
1-3	額定負載: Rated Load	R3.0*4.0偏心輪 R3.0*4.0偏心輪
1-4	旋轉方向: Direction of Rotation	順,逆時針 CCW/CW
1-5	工作溫度/濕度範圍: Operating Temperature Range/Humidity range	-10℃ ~ +50℃/ 5%~85%RH
1-6	儲存溫度/濕度範圍: Storage Temperature Range/Humidity range	-30℃ ~+70℃/ 5%~85%RH
1-7	馬達安裝方向: Motor Position	任意方向 All directions of protruded shaft

2. 標準測試條件:Standard Test Conditions

No.	項目:Items	規格:Specifications
2-1	馬達安裝方向: Motor Position	軸芯水平旋轉 Motor to be held with shaft horizontally
2-2	電源: Power Source	穩壓直流電源,確保測量時無疑問 Regulated power supply which assures unquestionable measurement
2-3	旋轉方向: Direction of Rotation:	從出力軸端看為順,逆時針方向 CCW when view from output shaft side
2-4	測試環境溫度與相對濕度: Environmental Temperature and Humidity	所定規格的測試一般是在室溫 10℃~30℃,相對濕度為30%~85%的狀況.若測試結果有疑慮時,應以JIS標準測試條件為判定基準 (20℃±2℃ 65%±5%RH) The test is made in principle at a temperature between 10℃to30℃, and at a relative humidity between 30%to 85%. If the test is questionable, it shall be judged from the test made at JIS Standard Testing Condition(20℃±2℃,65% ±5%RH)



SPEC No:HC2025-3-18-1

樣品規格

PAGES: 2/4

DATE: 2025-3-18

SPECIFICATIONS


EDITION: A1

3. 電氣特性: Electrical Characteristics

No.	項目:Items	規格:Specifications
3-1	額定電壓無負載條件下電流: No Load Current	最大mA mA max
3-2	額定電壓無負載條件下轉速: No Load Speed	
3-3	額定電壓額定負載條件下電流: Rated load Current	最大60mA 60mA max
3-4	額定電壓額定負載條件下轉速: Rated Load Speed	12000rpm±15%
3-5	空載起動電壓: Starting Voltage	無負載下最大1.5V 1.5V(max) no load
3-6	堵轉力矩: Stall Torque	額定電壓下最小為g.cm g.cm(min) at rated voltage.
3-7	堵轉電流: Stall Current	最大0.2A 0.2A max
3-8		
3-9		
3-10		

4. 電機的機械特性:Mechanical Characteristics

No.	項目:Items	規格:Specifications
4-1	馬達安裝方向: Motor Position	外形安裝時按圖要求(附外觀圖)電機應清潔無污,表面無碰傷變形及明顯刮傷痕,鍍層無剝落,緊配部件應牢固. As per the dimensional drawing No remarkable deformation or superfical defects to be observed by visual check. Fastened parts to be fixed firmly
4-2	軸向間隙: Shaft End Play	0.05-0.15mm
4-3	馬達外觀 External Appearance	參考馬達外觀圖 See Outline Drawing

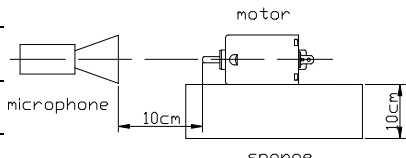No.	項目:Items	規格:Specifications
4-4	機械噪音: Mechanical Noise	<p>下列條件下最大60.0dB. 無負載, JIS-A等級下額定電壓(RMS), 按如下測量位置安裝馬達, 背景噪音&lt;60.0dB</p> <p>60.0dB(max.) with following condition. No load ,related voltage (RMS)on JIS-A scale With motor to be set and measured as below</p> <p>Background noise:60.0dB max</p> 

## 5. 環境實驗:Environmental tests

No.	項目:Items	規格:Specifications
5-1	振動實驗: Vibration Test	<p>馬達承受X. Y. Z三個方向的正弦波0.8mm震幅與每分鐘1000次震動頻率各測30分鐘後.</p> <p>Motors subjected to the sine wave of 0.8mm amplitude and 1000CPM in the X,Y and Z directions for 30 minutes each.</p>
5-2	跌落實驗: Drop Test	<p>馬達置於標準包裝盒內以盒子的六個面從80cm高度落在10mm厚的木板面上.</p> <p>Motors packed in standard inner box, are dropped at each of 6 planes of the box onto 10mm thick wooden plate from the height of 80cm.</p>
5-3	高溫儲存實驗: Storage Test under high temperature	<p>將馬達置於溫度(80℃ ±2℃), 濕度50% ±5%RH的實驗箱中, 放置72小時後取出, 在本檔2-4條件下放置24小時後測試.</p> <p>Motors exposed to(80℃ ±2℃、50%±5%RH) for 72 hours and then temperature /humidity of item 2-4for 24 hours.</p>
5-4	低溫儲存實驗: Storage Test under low temperature	<p>馬達置於溫度(-40℃ ±2℃)的實驗箱中, 放置72小時後取出, 在本檔2-4條件下放置24小時後測試.</p> <p>Motors exposed to(-40℃ ±2℃) for 72 hours and then to temperature /humidity of Item 2-4 for 24 hours.</p>
5-5	耐高濕儲存實驗: Storage test under high resisting high humidity	<p>馬達置於溫度為(40℃ ±2℃), 濕度為90%~95%RH的實驗箱中, 放置72小時後取出, 在本檔2-4條件下放置24小時後測試.</p> <p>Motors exposed to (40℃ ±2℃) 90%~95%RH for 72 hours and then to temperature / humidity of Item 2-4for 24 hours</p>
5-6	判定: Judgement	<p>以上各測試後, 馬達必需滿足3-1~3-9項規格要求</p> <p>All of specifications in item 3-1 ~ 3-9 are to be satisfied after the texts.</p>



# 东莞市环驰实业有限公司


DONGGUAN HUANCHI MOTOR CO., LTD.

## 使用环驰电机有限公司馬達一般注意事項

### General Instructions for Use of HuanChi motors DO'S and DON'TS to keep your motors in order

一、	如有含矽類物質及化合物，易吸附於馬達的換向器、電刷或其他部品，經馬達中之電能影響，會分解為SiO2、SiC及其他副產品，這些物質都會使換向器與電刷的接觸電阻急速增加。因此馬達在與含矽類物質及化合物一起使用時，要特別小心造成馬達部件的損傷。尤其在
	使用含矽類黏膠及密封材料，將馬達組入貴公司部品及產品時，請注意查明在使用及硬化時，不會產生揮發性之霧氣，傷害到馬達的
	特性及壽命。在選用氰化物、硫化物的黏膠時，也要特別小心造成馬達部件的腐蝕。
	If silicon materials, which contain low molecular silicon compound adhere to the motor's commutator, brush of other parts, then upon
	rectification of the electric energy the silicon breaks down into SiO2,SiC and other constituents which produce a rapid increase in the
	contact resistance between the commutator and brush. therefore great care should be taken when silicon material is used in a unit
	and check well at the same time that such binding agents or sealing materials are not generating gases of detrimental nature, whether
	used for motor mounting or applied during your product assemblies. care must be taken for an optimum selection, especially when
	using those of cyanic adhesive and sulfur gas.
二、	當組裝貴公司部品及產品時，請特別注意，勿使任何黏膠接觸到馬達的軸承，或讓黏膠流入馬達本體之內。
	When mounting your motors by means of binding agents, DON'T flow any adhesives to the Bearings nor intrusion into the motors.
三、	經由軸心，軸向壓入馬達的力量會對馬達的壽命有極大的影響，例如滑輪齒輪、風扇頁等。在有軸向壓力的狀況下，馬達的壽命應在貴
	公司部品及產品中實際操作環境下測試而得之數據為準。當軸向壓力過大時，應考慮用機械方式固定軸心
	Axial thrust on the output shaft could have an adverse effect on the motor life i.e... as is produced by worm gears, fans etc, check the
	service life expected under the actual operating conditions by testing the motors installed in your application products .for heavy thrust
	loads consider using something mechanical to retain the shaft end.
四、	在某些使用狀況，驅動馬達所使用的電源供應器之內電阻也會影響馬達的壽命。如馬達之驅動為低電壓之電源，而內電阻過大是會導致
	馬達不能達到預期的效果與特性。相反的情況，如馬達之驅動為高電壓之電源時，或常切換不同之驅動電壓時，內電阻過小時，會使馬達
	的壽命縮短。在周遭溫度與一般標準室溫有偏差時，尤其是過高或過低溫時，請特別注意電源及其內電阻的改變。
	There are occasions when the internal resistance of the motor driving power source (which contains an electrical circuit) can influence
	the life span of the motor. in instances where there is a low input of voltage to the motor, the internal resistance of The Power source
	is large which may well result in an inferior motor after a short time, conversely in instances where high cyclic voltage are applied, this
	internal resistance is small and the motor life span is shortened. when the temperature deviates from the normal room temperature as
	is the case in low and high temperature situations, please note the conditions.
五、	當有相當的軸心徑向的壓力，如軸心上加裝偏心輪，或操作環境有相當的震動時，馬達的壽命會受到嚴重的影響。在此情況，馬達的壽
	命必須由實際狀況操作的數據為依據。
	Motor life may be affected adversely by heavy radial load such as produced by rotating eccentric cams, etc., and also by vibration
	given from outside. Do check over such negative factors by testing the motors to the actual operating conditions in your application
	products.
六、	如果貴公司裝置吾司馬達或組立貴司產品時，所用設備、機械會發出超音波時，請特別注意，超音波有可能對馬達內部零件造成損害。
	If when mounting the motor and assembling the unit, equipment which emits ultrasonic waves is used there is a danger that some of
	the internal parts of the motor might be damaged so please take care,
七、	請勿將馬達儲存於高溫或高濕度的環境。請勿將馬達儲存於有腐蝕性氣體的環境。這些環境都會使馬達損壞，無法正常使用。
	DON'T store motors under environmental conditions of high temperature and extreme humidity.
	DON'T keep them also in an atmosphere where corrosive gas may be present, as it may result in malfunction.
八、	週遭環境及操作溫度會對馬達的特性與壽命有所影響。請特別留心使用此馬達時，週遭可能有的高溫或高濕度的環境。
	Ambient and operating temperatures exert an affect more or less on motor performance and Do pay particular attention to the
	surroundings when it is hot and damp
九、	如果貴司需要將齒輪、滑輪等零件壓入吾司馬達的軸心時，請一定要適當的、正確的支撐軸心的另一端或馬達的後蓋及其凸起。
	When press fitting a pulley, gear etc., onto the motor output shaft, always support the shaft from the other end on its retaining metal
	pad in a proper and correct way.
十、	如果貴公司組立貴司產品時，有焊接的工作，請務必將馬達上所有的貫穿孔、間隙都覆蓋好，不使焊渣、助焊劑、煙霧等有機會進入馬
	達。尤其在焊接馬達的連接線或端子時，要特別注意，焊接要盡快完成，否則，線材或端子週遭的塑膠會產生變形。其他預防措施也要
	盡量完善，以免造成馬達的損害。請務必將馬達的連接線或端子上殘留的助焊劑清除，否則在導電時會有異常狀況及損害。
	When soldering, BE SURE to finish your work quickly so as not to develop plastic deformation around the motor terminals nor to give
	them any forced bend or inward depression. in doing deformation- special care must be taken not to allow solder debris and flux to
	spatter into motors and precaution measures should be taken if necessary, by covering up all the nearby holes and apertures. Any
	motors having snap in terminals must also be attended carefully so as not to get flux in along the terminals, as it may cause failure in
	electrical conduction.
十一、	請務必注意，任何狀況下都不可將馬達的軸心鎖死。當馬達軸心鎖死時，會產生高熱，不但馬達本身會損壞，也會使週遭易燃物釀成災害。
	DON'T leave motor shaft locked while power is applied, as even a short time lock up may cause excessive heat build up resulting in
	burning damage to the motor depending on its specifications.
	若需要更詳細的資料，請與我們的業務員或授權的代理商直接聯絡。
	For more information, please contact us directly or through our sales and representative offices.

- 技术要求/Technical requirement
1. 额定电压/Rated voltage:DC3.0V
  2. 额定电流/Rated current:≤60mA
  3. 额定转速/Rated speed:12000±15%
  4. 堵转电流/Stall current:≤200mA
  5. 起动电压/Starting voltage:DC1.5V
  6. 轴向间隙/Shaft end paly:0.05-0.15

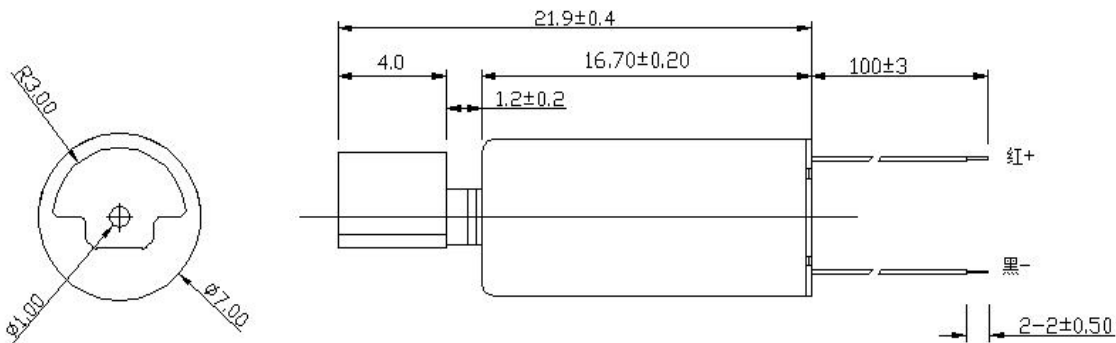

				产品型号:			0716		
				HC7C3.0*4.00100 (3.0-1.2)			图样标记	重量	比例
				外型图					
4				标记	处数	文件号			
3				标准	检查	工艺			
2				审核		审定			
1				检核		批准			
序号	代号	名称	数量	备注	设计	日期	材料	东莞市环驰实业有限公司	