


PRODUCT SPECIFICATION


CR1220

Lithium Button Cell



Dimensions





Unit:mm(inch)

Specifications

Chemical System: Lithium/Manganese Dioxide

IEC Name:CR 1220ANSI/NEDA:5012LCCamelion Model:CR1220Average Weight:0.8g

Dimension(\emptyset **x H**): 12.5^{-0.3}x2.0^{-0.2}mm

0.49^{-0.01}x0.08^{-0.01}inch

Terminals: Flat
Nominal Voltage: 3.0Volts
Capacity: 38mAh

(Rated at $62k\Omega$ to 2.00V)

Standard Discharge

Current: 0.1mA

Max. Continuous

Discharge Current: 0.3mA

Max. Pulse

Discharge Current:2.5 mAOperating Temperature: $-20 \degree -60 \degree$ Storage Temperature: $18 \degree -28 \degree$ Relative Humidity: $60 \pm 15 \%$

Cross Reference: E-CR1220(Energizer)
DL1220(Duracell)

DL1220(Duracell) KECR1220(Rayovac)

Usage Guide



Calculator



Remote control



Electronic scales

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- (2)Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- (3)When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- (4)In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.


Notice:




CR1220

Lithium Button Cell


Discharge Characteristics

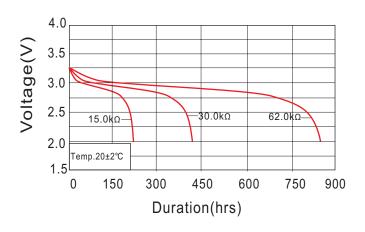


Temperature Characteristics

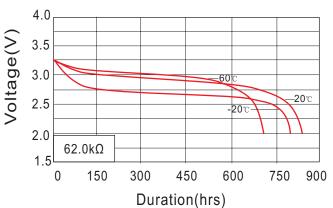

Load-capacity Characteristic

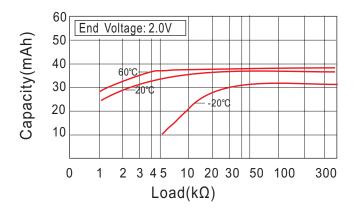

Operating Voltage

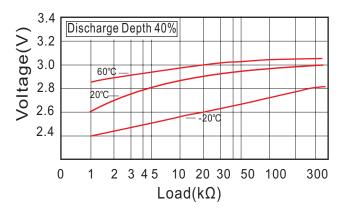

Pulse Discharge Characteristic Storage Characteristic

